


2Cx0.8

Cross Section

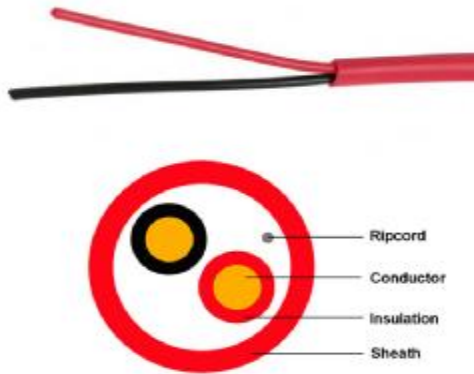

Regulatory

UL 444 & UL 13、 NEC Article 760 & NEC Article

EU RoHS 2011/65/EU Compliant

Application

Construction

| | |
|-----------------------------|----------------------|
| Conductor | Stranded Bare Copper |
| Conductor Dia. (±0.004mmmm) | 2C 22x0.25mm |
| Insulation | PO |
| Average Thickness(mm) | 0.76mm |
| Min. Point Thickness(mm) | 0.70mm |
| Insulation Dia.(±0.05mm) | 2.80mm |
| Colors | Black & Red |
| Shield | |
| Core wrap | Polyester Tape |
| Drain wire | 7/0.17TC±0.004mm |
| Shield | AL foil (Al in) |
| Jacket | LSZH |
| Average Thickness(mm) | 0.75mm |
| Min. Point Thickness(mm) | 0.70mm |
| Outer Dia.(±0.1mm) | 7.30mm |
| Rip Cord | Nylon |
| Color | Per request |

Marking:

Per request

package

Performance

Electrical Characteristics:

| | |
|---|----------------|
| Conductor DC Resistance 20oC (ohms/km) | 15.5 |
| proof voltage | Min AC1.5KV |
| AC Leakage Current Through overall AC 1500V | 10mA |
| Jacket | < 9.8 nF//100M |

Description

| | |
|---------------------|-----|
| Rated Temperature (| 75 |
| Rated Voltage(V) | 300 |

Photo and Packing