


Features:


- rack 19" 2U, or standalone universal,
- Internal IPS or MW POWER batteries,
- Max. capacity 6pcs inside,
- Suitable for UPS form RTS and TS1 series ,
- Suitable for 25 °C degrees.

Application: Longer backup time for UPS series RTS, TS1.

Photo:

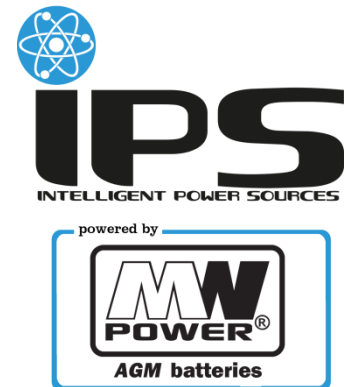

Dimension:

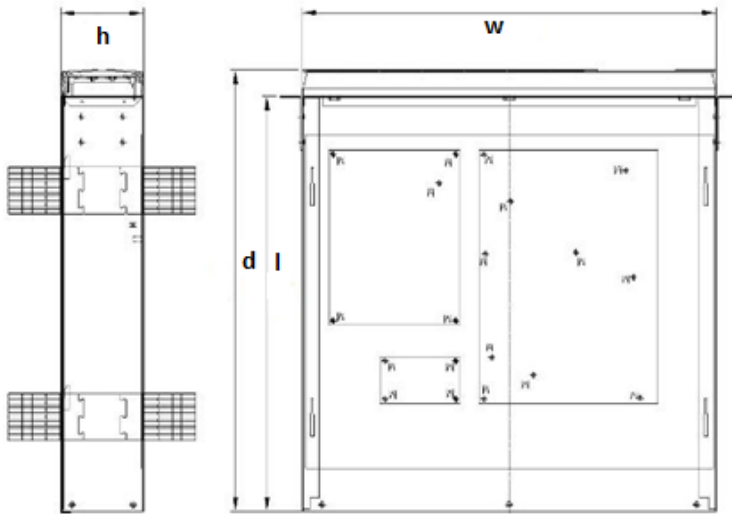

w – 19" / 482,6mm
h – 2U / 88mm
l – 440mm
d – 465mm

Technical parameter:

MODEL	KU-BAT-2URT-2x7-BC24
Rated voltage:	24Vdc
Internal batteris:	2x MW 7.2-12
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-LI-1k0-MC-LCD-2x7 RTS-LI-1k0-2U-LCD-2x7 TS1-ON-1k0-MC-LCD-2x7 RTS1-ON-1k0-2U-LCD-2x7

MODEL	KU-BAT-2URT-4x7-BC24
Rated voltage:	24Vdc
Internal batteris:	4x MW 7.2-12
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-LI-1k0-MC-LCD-2x7 RTS-LI-1k0-2U-LCD-2x7 TS1-ON-1k0-MC-LCD-2x7 RTS1-ON-1k0-2U-LCD-2x7

MODEL	KU-BAT-2URT-6x7-BC24
-------	----------------------

Rated voltage:	24Vdc
Internal batteris:	6x MW 7.2-12
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-LI-1k0-MC-LCD-2x7 RTS-LI-1k0-2U-LCD-2x7 TS1-ON-1k0-MC-LCD-2x7 RTS1-ON-1k0-2U-LCD-2x7

MODEL	KU-BAT-2URT-2x9-BC24
Rated voltage:	24Vdc
Internal batteris:	2x MWL 9-12L
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-LI-1k0-MC-LCD-2x9 RTS-LI-1k0-2U-LCD-2x9 TS1-ON-1k0-MC-LCD-2x9 RTS1-ON-1k0-2U-LCD-2x9

MODEL	KU-BAT-2URT-4x9-BC24
Rated voltage:	24Vdc
Internal batteris:	4x MWL 9-12L
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-LI-1k0-MC-LCD-2x9 RTS-LI-1k0-2U-LCD-2x9 TS1-ON-1k0-MC-LCD-2x9 RTS1-ON-1k0-2U-LCD-2x9

MODEL	KU-BAT-2URT-6x9-BC24
Rated voltage:	24Vdc
Internal batteris:	6x MWL 9-12L
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-LI-1k0-MC-LCD-2x9 RTS-LI-1k0-2U-LCD-2x9 TS1-ON-1k0-MC-LCD-2x9 RTS1-ON-1k0-2U-LCD-2x9

MODEL	KU-BAT-2URT-3x9-BC36
Rated voltage:	36Vdc
Internal batteris:	3x MWL 9,2-12L
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-LI-2k0-MC-LCD-3x9 RTS-LI-2k0-2U-LCD-3x9 TS1-ON-2k0-MC-LCD-3x9 RTS1-ON-k0-2U-LCD-3x9

MODEL	KU-BAT-2URT-6x9-BC36
Rated voltage:	36Vdc
Internal batteris:	6x MWL 9,2-12L
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-LI-2k0-MC-LCD-3x9 RTS-LI-2k0-2U-LCD-3x9 TS1-ON-2k0-MC-LCD-3x9 RTS1-ON-k0-2U-LCD-3x9

MODEL	KU-BAT-2URT-4x9-BC48
Rated voltage:	48Vdc
Internal batteris:	4x MWL 9,2-12L
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-LI-3k0-MC-LCD-4x9 RTS-LI-3k0-2U-LCD-4x9 TS1-ON-2k0-MC-LCD-4x9 RTS1-ON-k0-2U-LCD-4x9

MODEL	KU-BAT-2URT-6x9-BC72
Rated voltage:	48Vdc
Internal batteris:	6x MWL 9,2-12L
Height:	2U
Depth:	440mm
Connector wire lenght:	1m
Paraller :	Yes
Suitable for UPS models:	TS1-ON-3k0-MC-LCD-6x9 TS1-ON-2k0-MC-LCD-6x9 RTS1-ON-3k0-2U-LCD-6x9